


BASIC BENCHES



Ref. ASO-207

STRATIFIED TOP 40mm or WOOD TOP 40mm
Height of the bench: 840mm (top included)
 A PVC protective pad is placed underneath each foot.
 Maximum load 1000kg uniformly distributed.

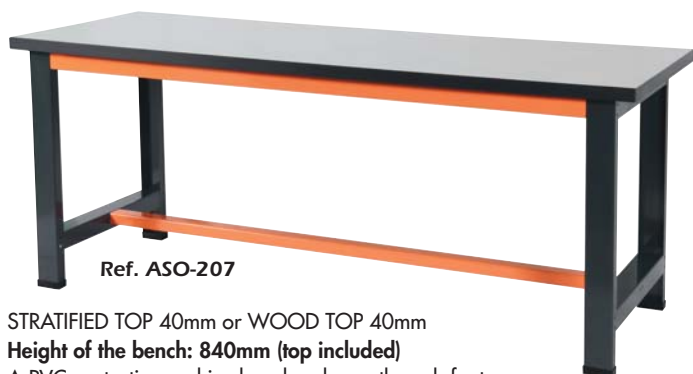

Ref. ASV-157

COLORS INFO


Foot charcoal grey (RAL 7016).
 Spar color at choice, see the table.

HIGH TEMPERATURE STRATIFIED TOP VERSION


Dimensions (mm)	Ref. Green RAL 6018	Ref. Orange RAL 2008	Ref. Blue RAL 5017	Ref. Grey RAL 7035	Ref. Grey RAL 7016
750 x 670	ASV-756	ASO-756	ASB-756	ASG-756	ASA-756
1200 x 750	ASV-127	ASO-127	ASB-127	ASG-127	ASA-127
1200 x 1000	ASV-1210	ASO-1210	ASB-1210	ASG-1210	ASA-1210
1500 x 750	ASV-157	ASO-157	ASB-157	ASG-157	ASA-157
1500 x 1000	ASV-1510	ASO-1510	ASB-1510	ASG-1510	ASA-1510
1800 x 750	ASV-187	ASO-187	ASB-187	ASG-187	ASA-187
1800 x 1000	ASV-1810	ASO-1810	ASB-1810	ASG-1810	ASA-1810
2000 x 750	ASV-207	ASO-207	ASB-207	ASG-207	ASA-207
2000 x 1000	ASV-2010	ASO-2010	ASB-2010	ASG-2010	ASA-2010

WOOD TOP VERSION

Dimensions (mm)	Ref. Green RAL 6018	Ref. Orange RAL 2008	Ref. Blue RAL 5017	Ref. Grey RAL 7035	Ref. Grey RAL 7016
750 x 670	ABV-756	ABO-756	ABB-756	ABG-756	ABA-756
1200 x 750	ABV-127	ABO-127	ABB-127	ABG-127	ABA-127
1200 x 1000	ABV-1210	ABO-1210	ABB-1210	ABG-1210	ABA-1210
1500 x 750	ABV-157	ABO-157	ABB-157	ABG-157	ABA-157
1500 x 1000	ABV-1510	ABO-1510	ABB-1510	ABG-1510	ABA-1510
1800 x 750	ABV-187	ABO-187	ABB-187	ABG-187	ABA-187
1800 x 1000	ABV-1810	ABO-1810	ABB-1810	ABG-1810	ABA-1810
2000 x 750	ABV-207	ABO-207	ABB-207	ABG-207	ABA-207
2000 x 1000	ABV-2010	ABO-2010	ABB-2010	ABG-2010	ABA-2010

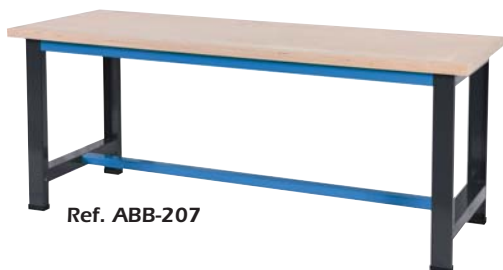

Ref. ABB-207

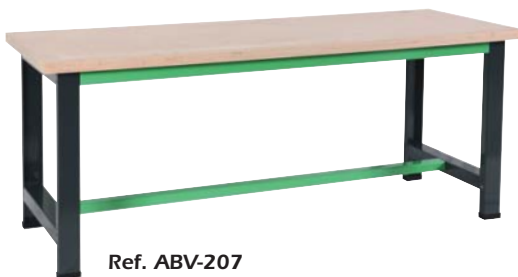

Ref. ABV-207



Ref. ABG-207

HIGH QUALITY CHART

Basement
guarantee

10
years

Accepted
load



Stratified
top

Heat
resistant

Abrasion
resistant

Scratch
resistant

Easy
for clean

Wood
top

Impact
resistant

QUALITY CHART

Quality of steel and paint

All parts of the metal frame are manufactured from electrogalvanised steel sheet, which is widely used in the car manufacturing industry and makes the sheet extremely resistant to corrosion. The iron/zinc combination forms a natural cell with moisture in the air that prevents the iron from corroding, even if shearing or scratching occurs. This protection is strengthened further by two layers of furnace-baked epoxy paint, which means that it is suitable for use even in tropical or coastal areas.

Color chart


RAL 2008
RAL 6018
RAL 5017
RAL 7016
RAL 7035

All others RAL
available upon
request



- Basement
Guarantee**
- 10
YEARS**
- 5 EPOXY PAINT LAYER 2
 - 4 EPOXY PAINT LAYER 1
 - 3 ELECTROGALVANIZED LAYER
 - 2 UNOXYDISED STEEL
 - 1 PVC BASE

Quality of top

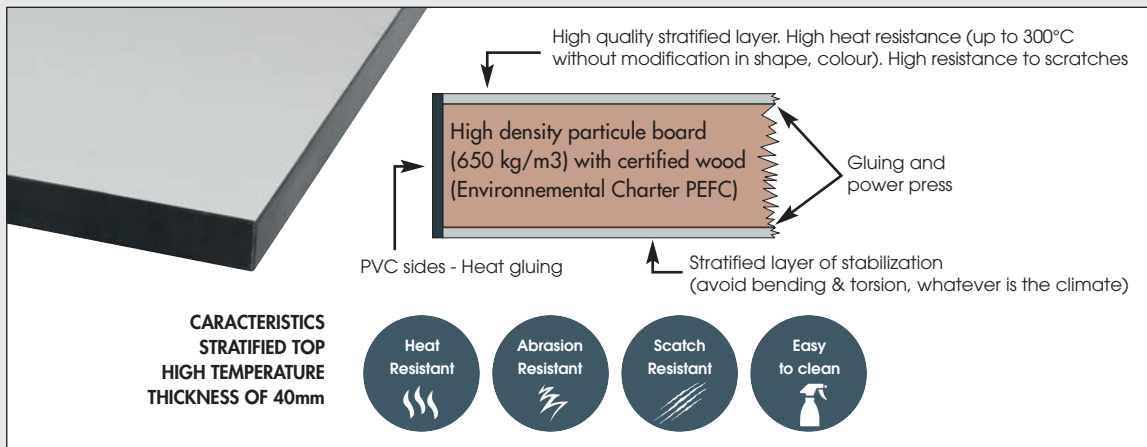

**CHARACTERISTICS
WOOD TOP
THICKNESS OF 40mm**



MAXIMUM LOAD

With basic basement



With basement on wheels



Discover our new range with
matt anodized aluminium structure.
All the aluminium parts are available
plain or painted. (See color chart)

